



HDBT[®] **4K x 2K**



PU-8H8HBTPL-4K

8 x 8 HDMI HDBaseT™ LITE Matrix(with PoE & 4K resolution support)

/// OPERATION MANUAL

DISCLAIMERS

The information in this manual has been carefully checked and is believed to be accurate. CYP (UK) Ltd assumes no responsibility for any infringements of patents or other rights of third parties which may result from its use.

CYP (UK) Ltd assumes no responsibility for any inaccuracies that may be contained in this document. CYP (UK) Ltd also makes no commitment to update or to keep current the information contained in this document.

CYP (UK) Ltd reserves the right to make improvements to this document and/or product at any time and without notice.

COPYRIGHT NOTICE

No part of this document may be reproduced, transmitted, transcribed, stored in a retrieval system, or any of its part translated into any language or computer file, in any form or by any means—electronic, mechanical, magnetic, optical, chemical, manual, or otherwise—without express written permission and consent from CYP (UK) Ltd.

© Copyright 2011 by CYP (UK) Ltd.

All Rights Reserved.

Version 1.1 August 2011

TRADEMARK ACKNOWLEDGMENTS

All products or service names mentioned in this document may be trademarks of the companies with which they are associated.

SAFETY PRECAUTIONS

Please read all instructions before attempting to unpack, install or operate this equipment and before connecting the power supply.

Please keep the following in mind as you unpack and install this equipment:

- Always follow basic safety precautions to reduce the risk of fire, electrical shock and injury to persons.
- To prevent fire or shock hazard, do not expose the unit to rain, moisture or install this product near water.
- Never spill liquid of any kind on or into this product.
- Never push an object of any kind into this product through any openings or empty slots in the unit, as you may damage parts inside the unit.
- Do not attach the power supply cabling to building surfaces.
- Use only the supplied power supply unit (PSU). Do not use the PSU if it is damaged.
- Do not allow anything to rest on the power cabling or allow any weight to be placed upon it or any person walk on it.
- To protect the unit from overheating, do not block any vents or openings in the unit housing that provide ventilation and allow for sufficient space for air to circulate around the unit.

REVISION HISTORY

VERSION NO.	DATE	SUMMARY OF CHANGE
v1.00	06/10/2014	First release
v1.01	16/08/2015	Minor corrections to text

CONTENTS

1. Introduction	6
2. Applications	6
3. Package Contents	6
4. System Requirements	6
5. Features	7
6. Operation Controls and Functions	8
6.1 Front Panel	8
6.2 Rear Panel	9
6.3 Side Panel	10
6.4 Remote Control	10
6.5 IR Cable Pin Assignment	11
6.6 RS-232 Pin Assignment	12
6.7 RS-232 & Telnet Commands	13
6.8 RS-232 UART Command Illustration Diagram	14
6.9 Telnet Control	16
6.10 Web GUI Control	18
7. Connection Diagram	20
8. Specifications	22
9. Acronyms	23

1. INTRODUCTION


The 4K2K 8 by 8 HDMI Matrix over CAT5e/6/7 supports the transmission of video (resolutions up to 4K2K Full HD), multi-channel digital audio from 8 HDMI sources to 8 outputs over a single CAT5e/6/7 cable (up to 60m) for each output. It supports high resolution digital audio formats such as LPCM 7.1CH, Dolby TrueHD, Dolby Digital Plus and DTS-HD Master Audio as well as 3D content that can be displayed when connecting a 3D TV and 3D source.

This matrix features control via manual selection buttons, IR, RS-232, Telnet or Web GUI. CYP provide control drivers for all the major control systems. This unit also supports UART RS232 pass-through and CEC control function of both sources and screens using Telnet, Web GUI or RS232.

The PU-8H8HBTPL-4K is designed to be used with PU-515PL-RX.

2. APPLICATIONS

 HDMI Matrix System

 Video/TV wall display and control

 Security surveillance and control

 Commercial advertising, display and control

 Retail sales and demonstration

3. PACKAGE CONTENTS

 4K2K 8x8 HDMI Matrix over CAT5e/6/7

 9xIR Blaster

 2x24V/6.25 A DC Power Adaptors


 2xPower Cable

 1xIR Remote Control

 Operation Manual

4. SYSTEM REQUIREMENTS

 HDMI equipped source devices, connect with HDMI cables or DVI equipped source, connect with DVI to HDMI cables

 HDMI equipped displays (TVs or monitors) or HDMI equipped AV receivers, connect with HDMI cables

 Industry standard CAT5e/6/7 cables

 HDBaseT™ Receivers

5. FEATURES


- /// HDMI, HDCP 1.1 and DVI compliant
- /// Supports resolutions VGA~WUXGA, 4K2K@24/25/30Hz & YUV_420 @60Hz and 480i~1080p dependent upon the output display's EDID settings
- /// Supports uncompressed video/audio up to 10.2Gbps
- /// Supports LPCM 7.1CH, Dolby TrueHD, Dolby Digital Plus and DTS-HD Master Audio transmission
- /// Supports distances up to 60 meters through CAT6/7 cables
- /// Supports 3D signal display dependent upon the output display EDID settings
- /// Supports PoC (Power over Cable) on compatible receivers only
- /// Supports HDMI input up to 15 meters at 8-bit resolution or 10 meters at 12-bit resolution
- /// Supports bi-directional IR from input and output locations
- /// Supports RS-232, remote control, on-panel control and IP Control (Telnet & Web GUI)
- /// 2U size design
- /// Supports external and internal EDID settings
- /// Supports RS-232 for Matrix Control, plus RS-232 pass-through: Third-party devices can be controlled in each zone via RS-232 from the head-end to the receiver, or head-end devices can be controlled via RS-232 from any receiver in any zone
- /// Supports CEC control function of both sources and screens using Telnet, Web GUI or RS232

Note:

1. *The PoC function is designed for powering compatible receiver units only—non-PoC receivers will need their own power supply. Receivers of another brand may not be compatible.*
2. *Do not connect the LAN port to CAT outputs of this device or to CAT inputs or receiver. Doing so may damage the unit.*

6. OPERATION CONTROLS AND FUNCTIONS

6.1 Front Panel

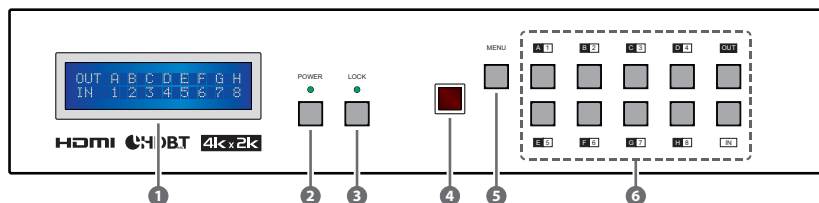


- ❶ **LCM** : Displays the setting information of each input and output setting.
- ❷ **POWER**: Press this button to power the device on/off. The LED will illuminate green when the power is on, red when it is in 'Standby' mode.
- ❸ **LOCK**: Press this button for 3 seconds to lock all the buttons on the panel; press again for 3 seconds to unlock. The LED will illuminate green when locked.
- ❹ **IR**: IR Receiver window (accepts the remote control signal of this device only).
- ❺ **MENU**: Press this button to access the LCM menu system, from here EDID settings can be managed and IP system settings are displayed.
- ❻ **1~8/A~H and In/Out**: Press the Out or In button to select the output or input mode and then press the required number button to make the selection accordingly.

For example, if outputs A~D need to be set to input 1 and outputs E~H need to be set to input 2, then the following sequence of button presses need to be performed:

Press: Out → A → B → C → D → In → 1 → Menu,
and then press: Out → E → F → G → H → In → 2 → Menu.

Note: If the menu button is not pressed the selection will not be changed.


6.2 Rear Panel

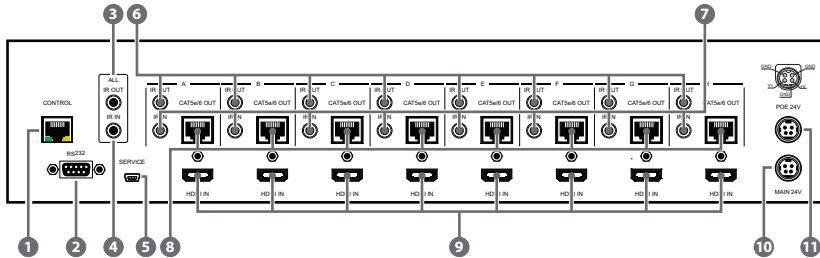

- 1 CONTROL:** Web GUI control (refer to Sections 6.9 and 6.10).
- 2 RS-232:** Connect to a PC or control system with D-Sub 9-pin cable for the transmission of RS-232 commands (see Section 6.6-6.8 for details).
- 3 ALL IR OUT:** Connect to the IR blaster for IR signal transmission to the source side. Place the IR blaster in direct line-of-sight of the equipment to be controlled for it will blaster out all signal received from the IR IN at the receiver sides.
- 4 ALL IR IN:** Connect to the IR extender for IR signal reception. Ensure that remote being used is within the direct line-of-sight of the IR extender for it will send out the signal to all receiver's IR OUT.
- 5 SERVICE:** Manufacturer use only.
- 6 IR OUT 1~8:** Connect to the IR blasters for IR signal transmission. Place the IR blaster in direct line-of-sight of the equipment to be controlled for it will blaster out the IR signal received from the receiver side chosen by input selection.
- 7 IR IN 1~8:** Connect to the IR extenders for IR signal reception. Ensure that remote being used is within the direct line-of-sight of the IR extender for it will send out the IR signal to the selected receiver's IR OUT.
- 8 CAT5e/6/7 OUT 1~8:** Connect from these CAT outputs to the CAT input port of the receiver units with a single CAT5e/6/7 cable for HDMI Audio/Video and IR/RS-232 control signal transmission.
- 9 HDMI IN 1~8:** Connect to the HDMI input source devices such as a DVD player or a Set-top Box with HDMI cable or DVI to HDMI cable.
- 10 DC 24V MAIN POWER:** Plug the 24 V DC power supply into the unit and connect the adaptor to an AC outlet.
- 11 PoC 24V:** Plug the 24 V PoC power supply into the unit and connect the adaptor to an AC outlet. This unit will power PoC (Power over Cable) capable receiver units.


Warning: Please do not connect the CAT5e/6/7 cable into the receiver's LAN port.

6.3 Side Panel

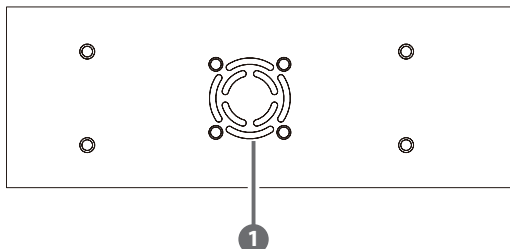



- 1 Fan Ventilator:** These are air ventilation areas, DO NOT block these areas or cover it with any object. Please allow adequate space around the unit for air circulation.

6.4 Remote Control

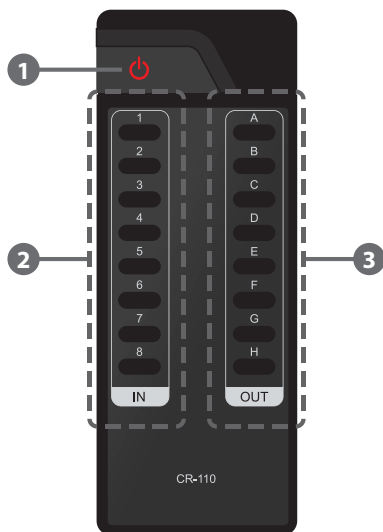


- 1 POWER:** Press this button to switch on the device or set it to standby mode.
- 2 IN:** Input ports selection 1~8.
- 3 OUT:** Output ports selection A~H.

6.5 IR Cable Pin Assignment

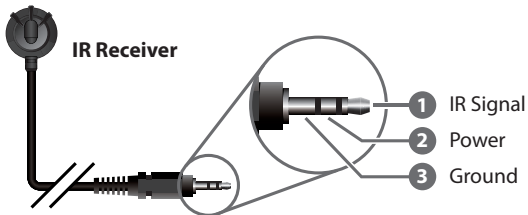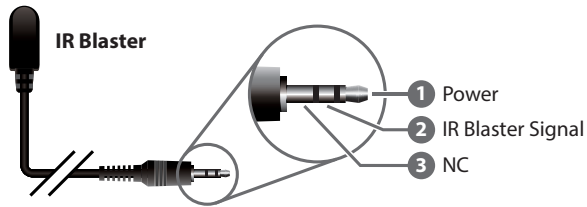

6.6 RS-232 Pin Assignment

Matrix			Remote Control Console	
PIN	Assignment		PIN	Assignment
1	NC		1	NC
2	Tx		2	Rx
3	Rx		3	Tx
4	NC		4	NC
5	GND		5	GND
6	NC		6	NC
7	NC		7	NC
8	NC		8	NC
9	NC		9	NC

Baud Rate: 19200 bps

Data bit: 8 bits

Parity: None

Stop Bit: 1


Flow Control: None

6.7 RS-232 & Telnet Commands

Command	Description
A1~A8	Switch Output A to 1~8
B1~B8	Switch Output B to 1~8
C1~C8	Switch Output C to 1~8
D1~D8	Switch Output D to 1~8
E1~E8	Switch Output E to 1~8
F1~F8	Switch Output F to 1~8
G1~G8	Switch Output G to 1~8
H1~H8	Switch Output H to 1~8
ABCD...1~ABCD...8	Switch Output A B C D... to 1~8 at the same time
SETIP <IP> <SubNet> <GW>	Setting IP. SubNet. GateWay (Static IP)
RSTIP	IP Configuration Was Reset To Factory Defaults <DHCP>
IPCONFIG	Display the current IP config
P0	Power OFF
P1	Power ON
I1~I8	Switch all the Output to 1~8
ST	Display the current matrix status and F/W version
RS	System Reset to A1, B2, C3, D4, E5, F6, G7, H8
EM	Setting EDID MODE. 1-STD 2-TV
?	Display all the available commands
Quit	Exit(for telnet only)

Note: Any commands will not be executed unless followed by a carriage return. Commands are case insensitive.

6.8 RS-232 UART Command Illustration Diagram

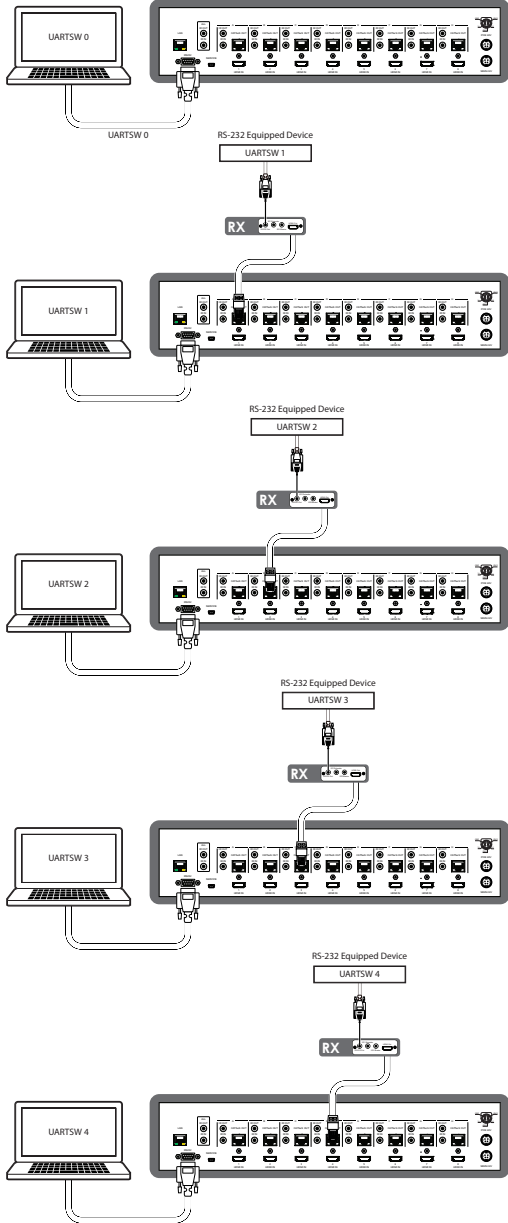


Note: This command allows RS-232 to control the Matrix.

Note: This command allows control of the RS-232 device connected to the Receiver attached to Output A.


Note: This command allows control of the RS-232 device connected to the Receiver attached to Output B.

Note: This command allows control of the RS-232 device connected to the Receiver attached to Output C.


Note: This command allows control of the RS-232 device connected to the Receiver attached to Output D.

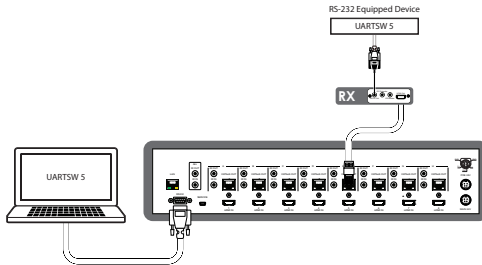


Note: This command allows control of the RS-232 device connected to the Receiver attached to Output E.

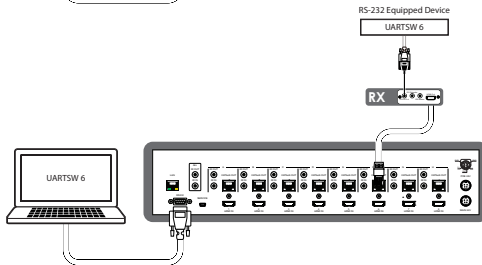

Note: This command allows control of the RS-232 device connected to the Receiver attached to Output F.

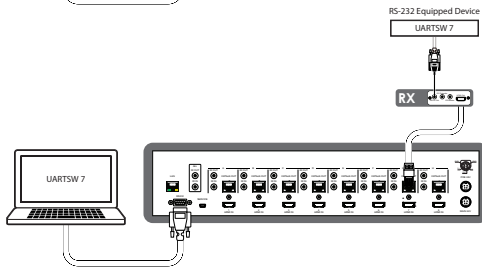

Note: This command allows control of the RS-232 device connected to the Receiver attached to Output G.

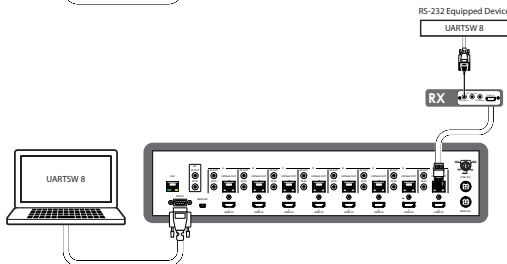

Note: This command allows control of the RS-232 device connected to the Receiver attached to Output E.


6.9 Telnet Control

Before attempting to use the telnet control, please ensure that both the Matrix (via the 'LAN' port) and the PC/Laptop are connected to the active networks.

To access the telnet control in Windows 7, click on the 'Start' menu and type "cmd" in the Search field then press enter.


Under Windows XP go to the 'Start' menu and click on "Run", type "cmd" with then press enter.

Under Mac OS X, go to Go→Applications→Utilities→Terminal
See below for reference.

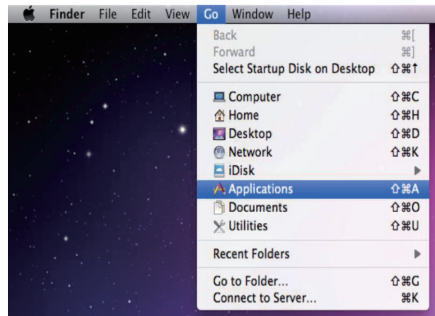


Once in the command line interface (CLI) type "telnet", the IP address of the unit you wish to control and "23", then hit enter.

Note: The IP address of the Matrix can be displayed on the device's LCM monitor by pressing the Menu button twice/three times.

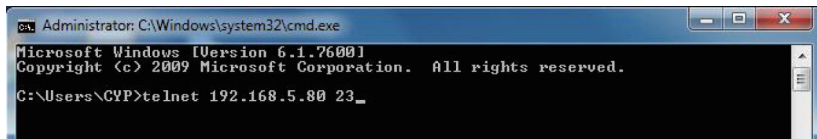

This will bring us into the device which we wish to control. Type "HELP" to list the available commands.

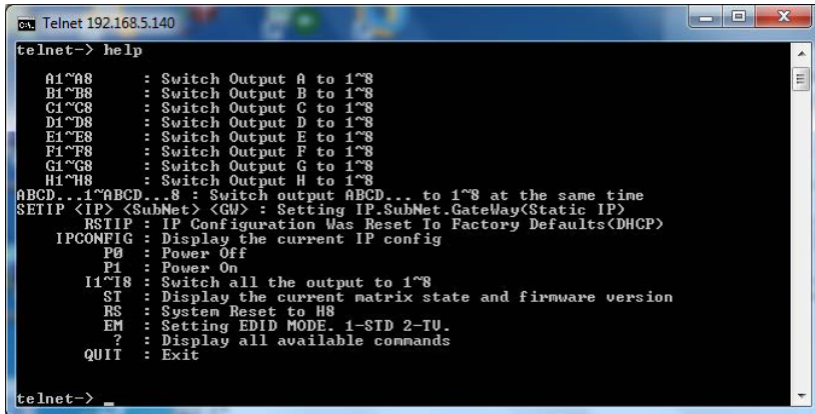

```

CYP Telnet 192.168.5.140
telnet-> help
A1~A8      : Switch Output A to 1~8
B1~B8      : Switch Output B to 1~8
C1~C8      : Switch Output C to 1~8
D1~D8      : Switch Output D to 1~8
E1~E8      : Switch Output E to 1~8
F1~F8      : Switch Output F to 1~8
G1~G8      : Switch Output G to 1~8
H1~H8      : Switch Output H to 1~8
ABCD...1~8 : Switch output ABCD... to 1~8 at the same time
SETIP <IP> <SubNet> <GW> : Setting IP,SubNet,Gateway<Static IP>
RSTIP      : IP Configuration Was Reset To Factory Defaults<DHCP>
IPCONFIG   : Display the current IP config
P0         : Power Off
P1         : Power On
I1~I8      : Switch all the output to 1~8
ST         : Display the current matrix state and firmware version
RS         : System Reset to H8
EM         : Setting EDID MODE. 1-STD 2-TV.
?          : Display all available commands
QUIT      : Exit
telnet-> _


```

Type "IPCONFIG" To show all IP configurations. To reset the IP, type "RSTIP" and to use a set static IP, type "SETIP" (For a full list of commands, see Section 6.7).


Note: Any commands will not be executed unless followed by a carriage return. Commands are not case-sensitive. If the IP is changed then the IP Address required for Telnet access will also change accordingly.

6.10 Web GUI Control

On a PC/Laptop that is connected to the same active network as the Matrix, open a web browser and type device's IP address on the web address entry bar. The browser will display the device's status, control and User setting pages.

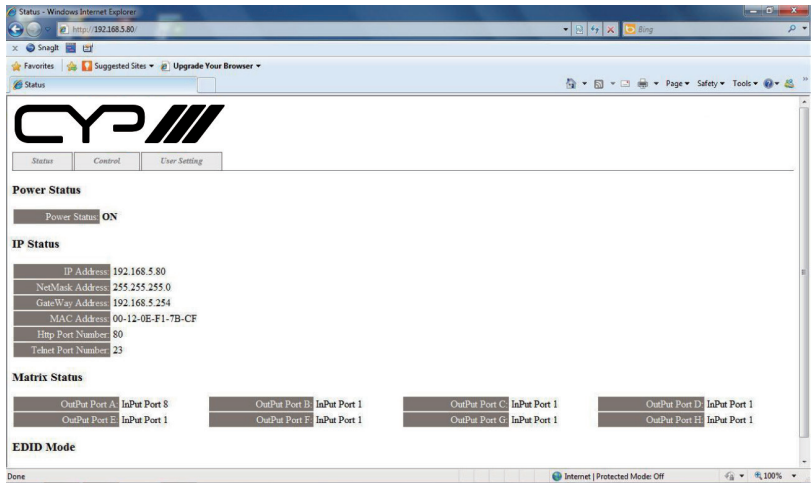

Click on the 'Control' tab to control power, input/output ports, EDID and reset mode.

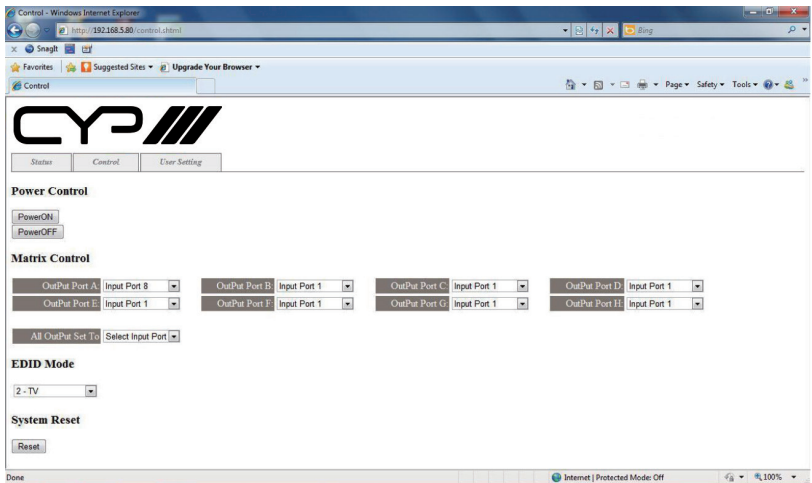


Clicking on the 'User Setting' tab allows you to reset the IP configuration. The system will ask for a reboot of the device every time any of the settings are changed. The IP address needed to access the Web GUI control will also need to be changed accordingly on the web address entry bar.


The screenshot shows a Windows Internet Explorer browser window displaying the 'User Setting' page of a CYP device. The address bar shows 'http://192.168.5.80/user.php'. The page features the CYP logo at the top and three tabs: 'Status', 'Control', and 'User Setting'. The 'User Setting' tab is active, showing the 'IP Address Selection' section. This section contains a form with the following fields:

Address Type:	DHCP/Static		
Static IP Address:	Static IP	5	80
Subnet Mask:	255	255	0
Default Gateway:	192	168	254

Below the form is an 'Update Settings' button. The browser's status bar at the bottom indicates 'Internet | Protected Mode: Off' and a zoom level of 100%.

7. CONNECTION DIAGRAM

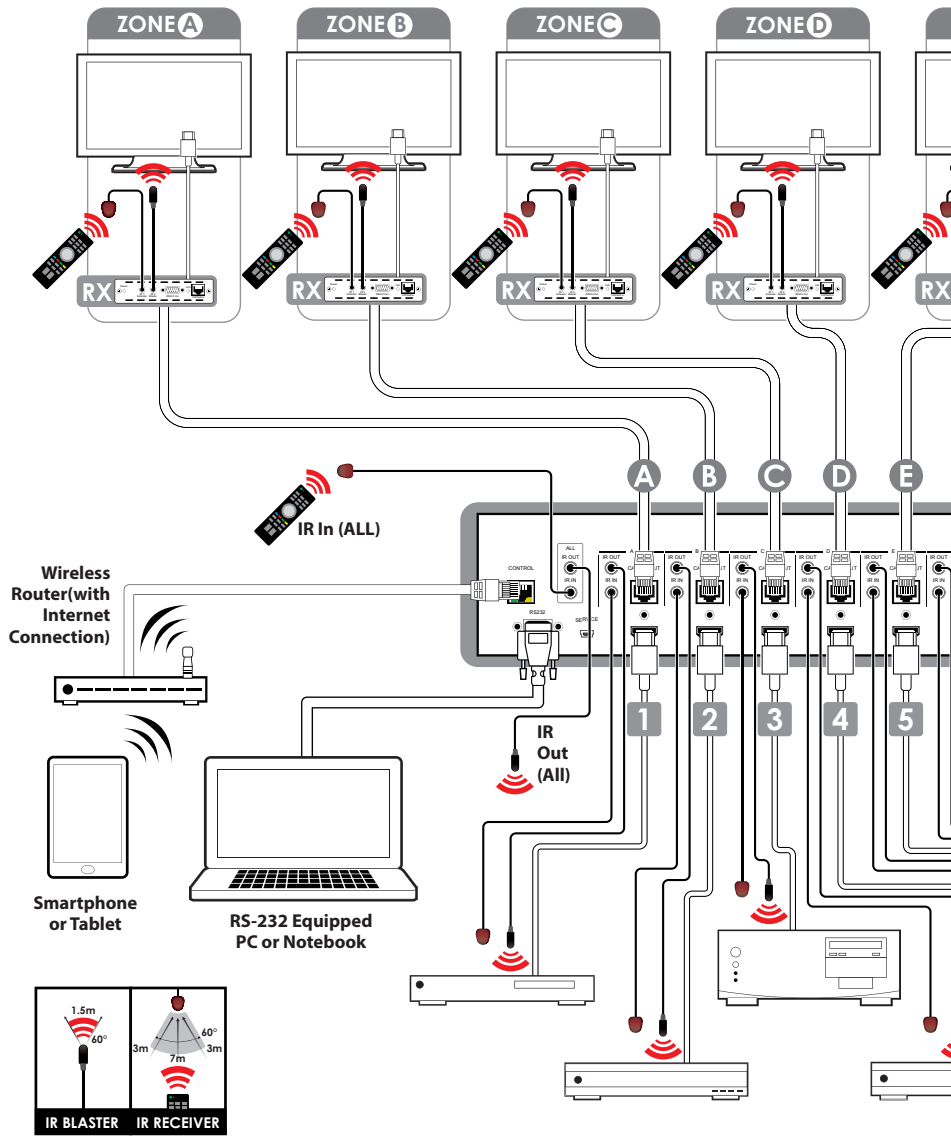

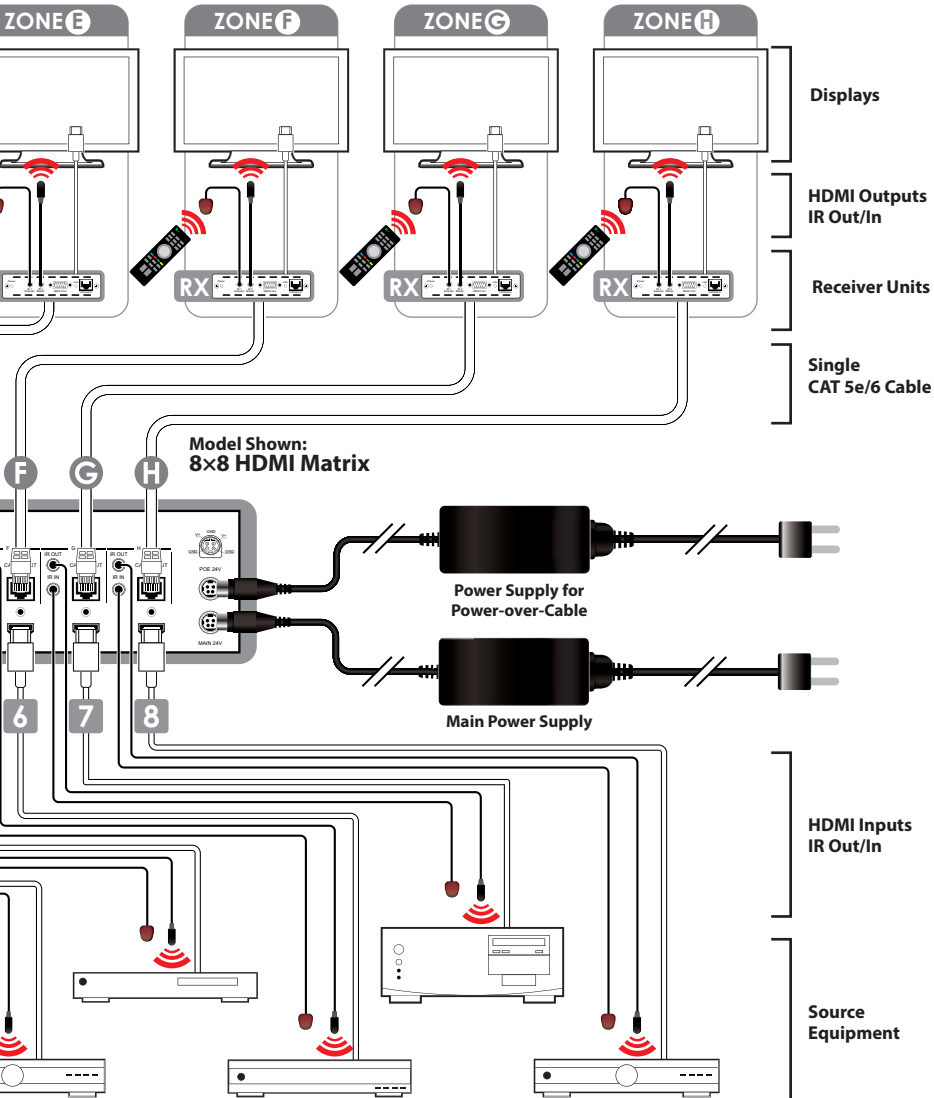

8. SPECIFICATIONS

Video Bandwidth	300 MHz/9 Gbps
Input Ports	8×HDMI, 9×IR Extender, 1×RS-232, 1×LAN, 1×Mini USB-B type (for firmware update only)
Output Ports	8×CAT5e/6/7, 9×IR
ESD Protection	Human-body Model: ± 8kV (Air-gap discharge) ± 4kV (Contact discharge)
Power Supply	24 V/6.25 A DC (US/EU standards, CE/FCC/UL certified)
Dimensions	438 mm (W)×235 mm (D)×88mm (H)/Jacks Excluded 438 mm (W)×249 mm (D)×93mm (H)/Jacks Included
Weight	4402g
Chassis Material	Metal
Colour	Black
Operating Temperature	0 °C~40 °C/32 °F~104 °F
Storage Temperature	−20 °C~60 °C/−4 °F~140 °F
Relative Humidity	20~90% RH (non-condensing)
Power Consumption	65 W Tx (Main), 56 W Rx (PoE)

9. ACRONYMS

ACRONYM	COMPLETE TERM
CLI	Command Line Interface
DTS	Digital Theater System
DVI	Digital Visual Interface
EDID	Extended Display Identification Data
GUI	Graphical User Interface
HDCP	High-bandwidth Digital Content Protection
HDMI	High-Definition Multimedia Interface
HDTV	High-Definition Television
LCM	Liquid Crystal Module
USB	Universal Serial Bus
VGA	Video Graphics Array
WUXGA	Widescreen Ultra Extended Graphics Array



CYP (UK) Ltd., Unit 7, Shepperton Business Park, Govett Avenue, Shepperton,
Middlesex, TW17 8BA

Tel: +44 (0) 20 3137 9180 | Fax: +44 (0) 20 3137 6279

Email: sales@cypeurope.com

www.cypeurope.com

v1.01