


## PSK

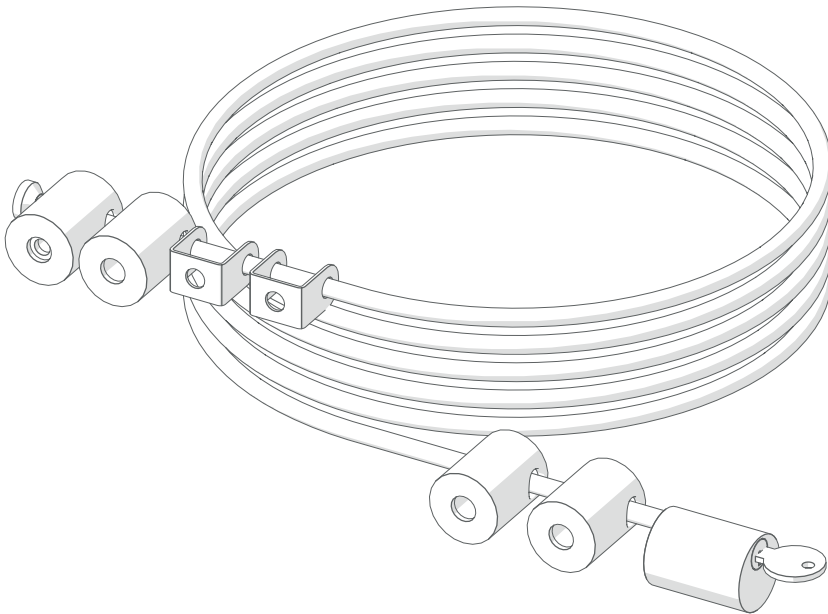

Screen Size: N/A | Guide Max. Weight: N/A

*\*Please check model specific details before installing\**

Revised 11/12/20

### WARNING

Please carefully inspect the product before assembling. If you notice any apparent damage, call your carrier claims agent and do not continue the installation until it has been reviewed. Please watch for pinch points. Do not put your fingers between moveable parts. Do not tamper with or disassemble any spring loaded parts. Before installing, make sure that the supporting surface will support five times the combined load of the solution and the hardware. Never exceed the maximum load capacity. Please also layout all components to ensure that you have all of the required parts before proceeding (see BOM list on following page). Use of this product for anything other than its specified use may result in failure or personal injury. This product is intended for indoor use only. We recommend using a qualified trades person for installation. Use an assistant or lifting equipment to lift and position products.



*For support, please call: +44 (0)1865 767676 or email: sales@unicol.com*

#	TOOLS REQUIRED
1	n/a

INSTALLERS REQUIRED
1

**COMPONENTS**

#	DESCRIPTION	QTY
1	Securing Ferrules	3
2	Brackets	2
3	Keys	2
4	Barrel Lock	1
5	Tetherloc Cable with 1x Securing Ferrule and 1x Retaining Washer	1

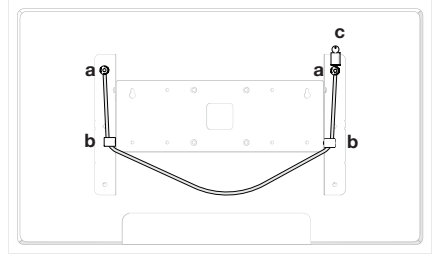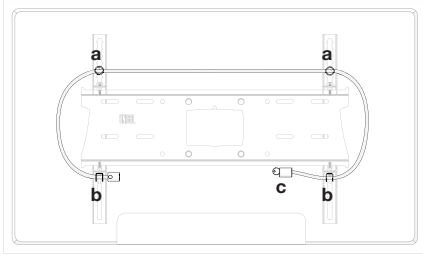

### UNIVERSAL MOUNT FIXING (PZX/PZW)


Place the top two fixing screws (a) that hold the mount to the screen through the two ferrules (1) and tighten. Place the mount arm securing screws (b) through the brackets (2) and tighten.

Thread the cable (5) through the ferrules and brackets. Snap the end of the cable into the barrel lock (c) to complete the installation.

### DEDICATED MOUNT FIXING (PLX/PLW)

Place the top two fixing screws (a) that hold the mount to the screen through the two ferrules (1) and tighten. Place one of the fixings that connects the mount arm and wall plate together (b) at either end into the two remaining ferrules (1) and tighten.

Thread the cable (5) through the ferrules and brackets. Snap the end of the cable into the barrel lock (c) to complete the installation.

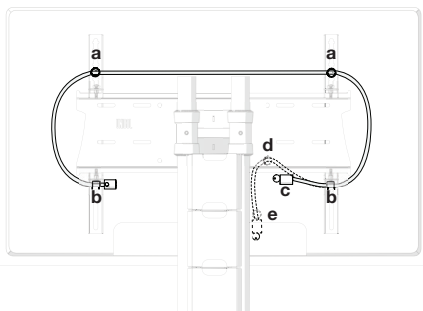

### STAND / TROLLEY FIXING

Follow the above instructions depending on which mount you are fitting too.

To secure the solution to the wall, use one of the ferrules to hide the screw head of one of the stand/trolley mount fixing points (d). Use the remaining ferrule (e) to attach to the wall (fixing screw not included).