

USB Type C to HDMI Adapter
USB Type C Plug (Male) to HDMI Jack (Female)
EXP-HDMI-USBC

Specification Sheet



WyreStorm - Powerful. Reliable. Simple.

Introduction

The EXP-HDMI-USBC is a passive adapter that converts USB-C audio and video from a connected PC or USB-C smart device to HDMI, allowing the user to mirror or extend to UHD displays with resolutions of up to 4K@60Hz.

Key Features

- Converts USB-C signals to HDMI
- Mirrors or extends to a second monitor
- Supports resolutions of up to 4K@60Hz
- Simple, plug-and-play design


In the Box

1x EXP-HDMI-USBC USB Type C to HDMI Adapter

Specifications

Audio and Video	
Input	1x USB: Type C Male
Output	1x HDMI: 19-pin type A Female
Output Video Encoding	Uncompressed
Encoding Data Rate	18 Gbps
End to End Latency	Zero
Audio Formats	2ch PCM Multichannel: LPCM and Up to DTS-X and Dolby Atmos
Video Resolutions (Max)	1920x1080p @240Hz 8bit RGB 2560x1440p @120Hz 8bit RGB 4096x2160p @60Hz 10bit HDR 4:2:0 4096x2160p @60Hz 12bit HDR 4:2:2 4096x2160p @60Hz 10bit HDR 4:4:4 4096x2160p @60Hz 10bit RGB
Supported Standards	DCI RGB HDR HDR10 Dolby Vision HLG BT.2020 BT.2100
Maximum Pixel Clock	600MHz
Communication and Control	
HDMI	TMDS HDCP 2.2 EDID
Supported Functions	Ethernet Audio Return Channel (ARC) CEC Auto Low Latency Mode (ALLM) Variable Refresh Rate (VRR)
Environmental	
Operating Temperature	32°F ~ 113°F (0°C ~ 45°C) 10% ~ 90%, non-condensing
Storage Temperature	-4°F to ~ 140°F (-20°C ~ +60°C) 10% ~ 90%, non-condensing
Maximum BTU	N/A
Dimensions and Weight	
Height	15mm/0.6in
Width	44mm/1.7in
Depth	200mm/7.9in
Weight	0.009kg/0.019lbs
Regulatory	
Safety and Emission	CE FCC RoHS RCM EAC

Right Product for the Right Application.

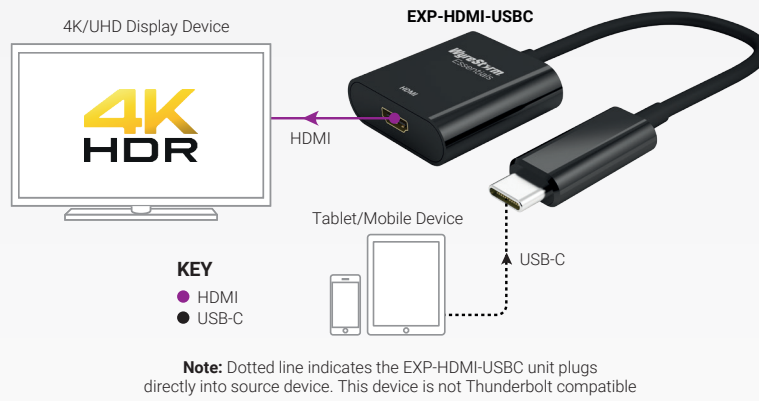

Note: WyreStorm reserves the right to change product specification, appearance or dimensions of this product at any time without prior notice.