
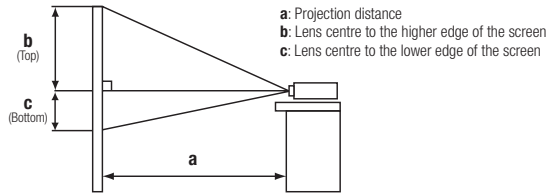
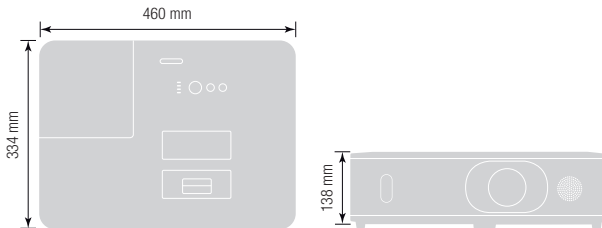


CP-WU5500 / CP-WU5505

Technical Specifications

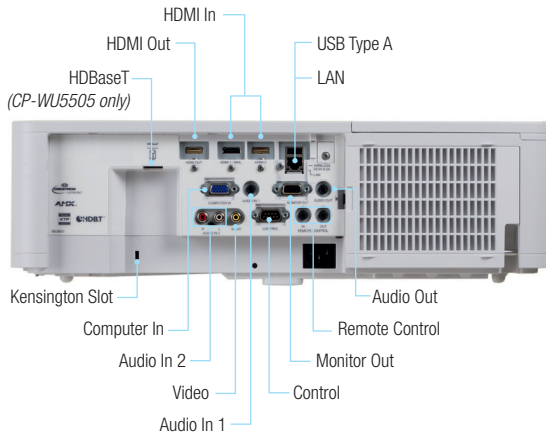

| 4:3 | | | | | | |
|--------------|-------|------|-------|-------|---------|------------|
| Screen size | H x V | | Wide | Tele | b (Top) | c (Bottom) |
| 30" (0.76m) | 0.6m | 0.5m | 1.5m | 2.6m | 0.59m | 0.13m |
| 50" (1.27m) | 1.0m | 0.8m | 2.6m | 4.4m | 0.98m | 0.21m |
| 100" (2.54m) | 2.0m | 1.5m | 5.2m | 8.9m | 1.95m | 0.43m |
| 150" (3.81m) | 3.0m | 2.3m | 7.8m | 13.4m | 2.93m | 0.64m |
| 200" (5.08m) | 4.1m | 3.0m | 10.4m | 17.9m | 3.91m | 0.86m |
| 250" (6.35m) | 5.1m | 3.8m | 13.1m | 22.4m | 4.88m | 1.07m |
| 300" (7.62m) | 6.1m | 4.6m | 15.7m | 26.9m | 5.86m | 1.29m |

| 16:9 | | | | | | |
|--------------|-------|------|-------|-------|---------|------------|
| Screen size | H x V | | Wide | Tele | b (Top) | c (Bottom) |
| 30" (0.76m) | 0.7m | 0.4m | 1.3m | 2.3m | 0.50m | 0.12m |
| 50" (1.27m) | 1.1m | 0.6m | 2.2m | 3.9m | 0.83m | 0.21m |
| 100" (2.54m) | 2.2m | 1.2m | 4.5m | 7.8m | 1.66m | 0.42m |
| 150" (3.81m) | 3.3m | 1.9m | 6.8m | 11.7m | 2.49m | 0.62m |
| 200" (5.08m) | 4.4m | 2.5m | 9.1m | 15.6m | 3.32m | 0.83m |
| 250" (6.35m) | 5.5m | 3.1m | 11.4m | 19.5m | 4.15m | 1.04m |
| 300" (7.62m) | 6.6m | 3.7m | 13.7m | 23.4m | 4.98m | 1.25m |

| 16:10 | | | | | | |
|--------------|-------|------|------|-------|---------|------------|
| Screen size | H x V | | Wide | Tele | b (Top) | c (Bottom) |
| 30" (0.76m) | 0.6m | 0.4m | 0.8m | 1.5m | 0.40m | 0m |
| 50" (1.27m) | 1.1m | 0.7m | 1.4m | 2.5m | 0.67m | 0m |
| 100" (2.54m) | 2.2m | 1.3m | 2.9m | 5.0m | 1.35m | 0m |
| 150" (3.81m) | 3.2m | 2.0m | 4.4m | 7.6m | 2.02m | 0m |
| 200" (5.08m) | 4.3m | 2.7m | 5.9m | 10.1m | 2.69m | 0m |
| 250" (6.35m) | 5.4m | 3.4m | 7.4m | 12.6m | 3.37m | 0m |
| 300" (7.62m) | 6.5m | 4.0m | 8.9m | 15.2m | 4.04m | 0m |

| OPTICAL | |
|----------------------------|---|
| Display device | 3 LCD 0.67" aspect ratio 16:10 |
| Resolution | WUXGA (1920 x 1200) |
| Brightness | 5200lm |
| Contrast ratio | 10,000:1 |
| Standard Lens | Manual focus, manual zoom x 1.7 |
| Lens shift | Vertical 1:1~10:0(0~+50%) Horizontal 1.20:1~1.20(+/-4.4%) at Vertical 1:1(0%) |
| Lamp wattage | 300W |
| Diagonal display size | 30"~300" |
| Lamp life | 4000 hours (Normal Mode) / 6000 hours (Eco Mode)* |
| Distance to width ratio :1 | 1.4 (Wide) / 2.3 (Tele) |
| Focus distance | 0.8m~8.9m (Wide) / 1.5m~15.2m (Tele) |

| COMPATIBILITY | |
|------------------------|--|
| Computer compatibility | VGA, SVGA, XGA, WXGA, WXGA+, SXGA, SXGA+, WSXGA+, UXGA, WUXGA, MAC 16" |
| Composite/S-Video | NTSC, PAL, SECAM, PAL-M, PAL-N, NTSC4.43 |
| Component Video/HDMI | 525i(480i), 525p(480p), 625i(576i), 1125i(1080i@50/60), 750p(720p@50/60), 1125p(1080p@50/60) |

| FEATURES | |
|---------------------|---|
| Speaker | 16W Mono |
| Picture adjustments | Vertical 10:0 (+50%) shift, Normal at + 13.0°~7.6° projection angle |
| Advances features | Accentualizer technology, DICOM simulation, Instant stack, HDCR (High Dynamic Contrast Range), Edge blending, Warping, HDBaseT (CP-WU5505 only), Image Optimizer, PinP, PbyP, Picture Shift, Cloning function |
| Network | Projector control, Network presentation, Wireless capability, AMX Device Discovery, Crestron RoomView® compatible, Extron XTP system compatible (CP-WU5505 only) |
| Security | Password/My Screen, PIN Lock, Key lock |
| OSD languages | English, French, German, Spanish, Italian, Norwegian, Dutch, Portuguese, Japanese, Traditional Chinese, Simplified Chinese, Korean, Swedish, Russian, Finnish, Polish, Turkish, Persian, Arabian, Thai, Danish, Czech, Hungarian, Romanian, Slovenian, Croatian, Lithuanian, Estonian, Latvian, Greek, Brasileiro, Indonesian, Vietnamese |

| CONNECTIONS | |
|-------------------------------|---|
| Digital input | 2 x HDMI connector (HDCP1.4 compliant) |
| HD Base T | No (CP-WU5500)/Yes (CP-WU5505) |
| Computer input | 1 x Mini-D-sub 15-pin connector |
| Monitor output | 1 x D-sub 15-pin connector, 1 x HDMI |
| Video input | 1 x RCA connector |
| Control | 1 x D-sub 9-pin connector |
| USB | 1 x USB Type A (Used for wireless network) |
| Wired network | 1 x RJ45 jack |
| Wireless network | IEEE802.11b/g/n (Optional USB wireless adaptor is required) |
| Wired remote control (in/out) | 1 x 3.5mm mono mini connector |

| POWER | |
|---------------------------|--|
| Power requirements | AC 100V-120V (50/60Hz) 4.4A, AC 220V-240V (50/60Hz) 2.2A |
| Maximum power consumption | AC 100V-120V (50/60Hz) 440W, AC 220V-240V (50/60Hz) 420W |

| PHYSICAL | |
|------------------------|---|
| Dimensions (W x H x D) | 460 x 138 x 334mm (excluding feet and extrusions) |
| Weight | <6.5kg (TBD) |
| Noise level | 38dB (Normal Mode) / 29dB (Eco Mode) |
| Operating temperature | 0 -40°C (Normal Mode) / 0-45°C (Eco Mode) |
| Air filter | 10,000 hours |

| CERTIFICATION | |
|---------------------------------|--|
| EMC, Low Voltage, ErP, RoHS, CE | |

| INCLUDED ACCESSORIES | |
|--|--|
| 1 x Power Cord Euro cord (1.8 m) / 1 x US cord (1.8 m), 1 x Computer Cable (1.8 m), 1 x IR Remote Control Unit, 1 x Security Label, 2 x AA Batteries, 1 x Application CD (for network, etc.), 1 x User's Manual CD (Operating Guide, Network Function, Safety Instructions, User's Manual (Concise)), 1 x Adapter Cover, 3 x HDMI cable holder, 3 x Cable Tie, 1 x Cable Tie for Power Cord, 1 x Hook Metal, 1 x Screw, 1 x Lens Cover | |

| OPTIONAL ACCESSORIES | |
|----------------------|----------------------------|
| Lamp | DT01931 (Including filter) |
| USB wireless adaptor | USB-WL-11N |

| WARRANTY | |
|----------------|----------------------|
| Projector/Lamp | 3 Years / 6 Months** |



*The stated lamp and filter life refers to the average life expected in ideal operating conditions with usage in accordance with the manual. The majority of, but not all lamps and filters should achieve this figure. **Where a lamp fails within warranty and a replacement lamp is taken, the warranty for the replacement lamp will be a maximum of 6 months (dependent on warranty hours stated). HDMI, the HDMI logo and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC. AMX and the AMX logo, and Device Discovery are all registered trademarks of AMX. Crestron® and RoomView™ are registered trademarks or trademark of Crestron Electronics, Inc. The specification above and photography is for reference only and may be subject to change.