


# Adapter Ring with USB-C, DisplayPort & Mini DisplayPort to HDMI with Cable Lock

WyreRing

WyreStorm®

Specification Sheet

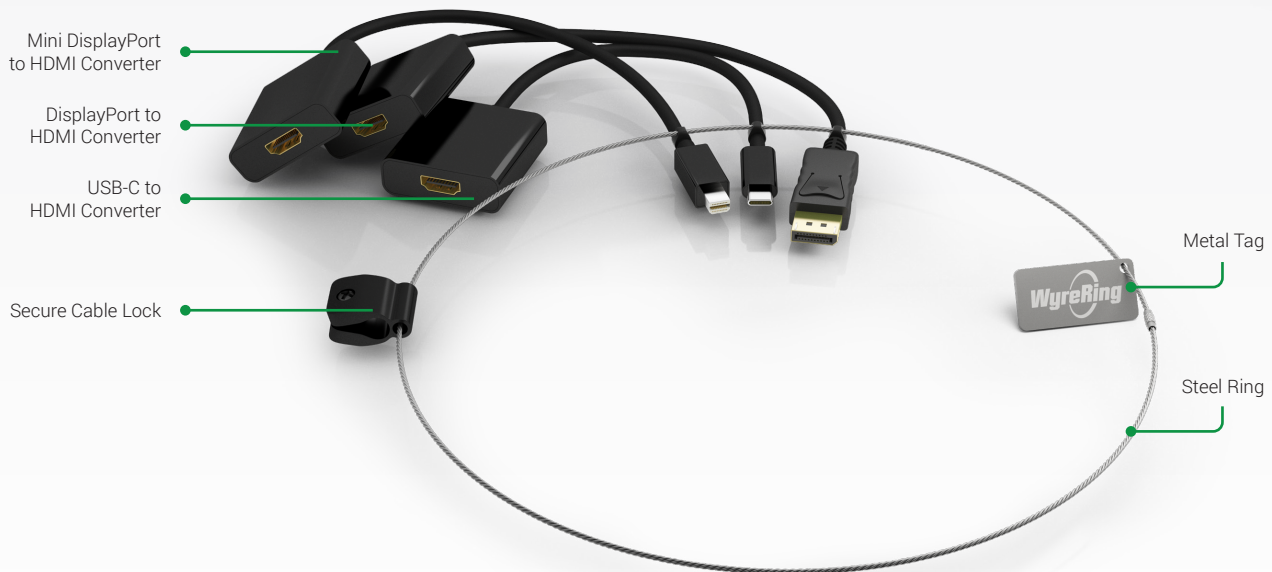

4K HDR HDMI HDCP

WyreStorm - Powerful. Reliable. Simple.

## Introduction

The WyreRing provides a simple yet effective way to ensure compatibility of BYOD in a meeting space without the need for a presentation switcher or over-specified system. The simple adapter ring provides 3 HDMI converters: USB-C, DisplayPort and Mini DisplayPort. All 3 converters support up to 4K60 video passthrough. The secure cable lock attaches to any HDMI cable up to 10mm in diameter. The metal reinforced ring provides a strong and durable connection to the converters that won't wear out after repeated use.

## Key Features

- 3 HDMI converters included: USB-C, DisplayPort & Mini DisplayPort
- Ideal for small meeting spaces where presentation switchers are not needed
- All converters are capable of transmitting 4K60 video content
- Secure cable lock ensures connection of the WyreRing to HDMI cable is there to stay
- Metal reinforced ring provides durable and secure connection to converters
- Metal information tag attached provides model number and information
- Includes crosshead screwdriver for attaching cable lock to HDMI cable

## In the Box

- 1x USB-C Adapter
- 1x DisplayPort Adapter
- 1x Mini DisplayPort Adapter
- 1x Secure cable lock
- 1x Steel ring
- 1x Crosshead screwdriver
- 1x Metal tag

# Specifications

<b>Audio and Video</b>	
<b>Adapters</b>	1x USB-C 1x DisplayPort 1x Mini DisplayPort
<b>Video Resolutions (Max)</b>	3840x2160 @60Hz 4:4:4
<b>Audio Formats</b>	2ch Analog   PCM
<b>Supported Standards</b>	DCI   RGB   HDCP
<b>Ring &amp; Cable Lock</b>	
<b>Cable Lock</b>	Secured to cable up to 10mm in diameter using crosshead screw
<b>Ring</b>	Length: 55cm
<b>Environmental</b>	
<b>Operating Temperature</b>	0 to + 45°C (32 to + 113 °F), 10% to 90%, non-condensing
<b>Storage Temperature</b>	-20 to +70°C (-4 to + 158 °F), 10% to 90%, non-condensing
<b>Dimensions and Weight</b>	
<b>Length x Width x Height</b>	DisplayPort Adapter: 200 x 45 x 15mm Mini DisplayPort Adapter: 200 x 45 x 15mm USB-C Adapter: 200 x 45 x 15mm
<b>Weight</b>	0.11kg/0.25lbs
<b>Regulatory</b>	
<b>Safety and Emission</b>	CE   FCC   RoHS   RCM   EAC

**Note:** WyreStorm reserves the right to change product specification, appearance or dimensions of this product at any time without prior notice.